inphic

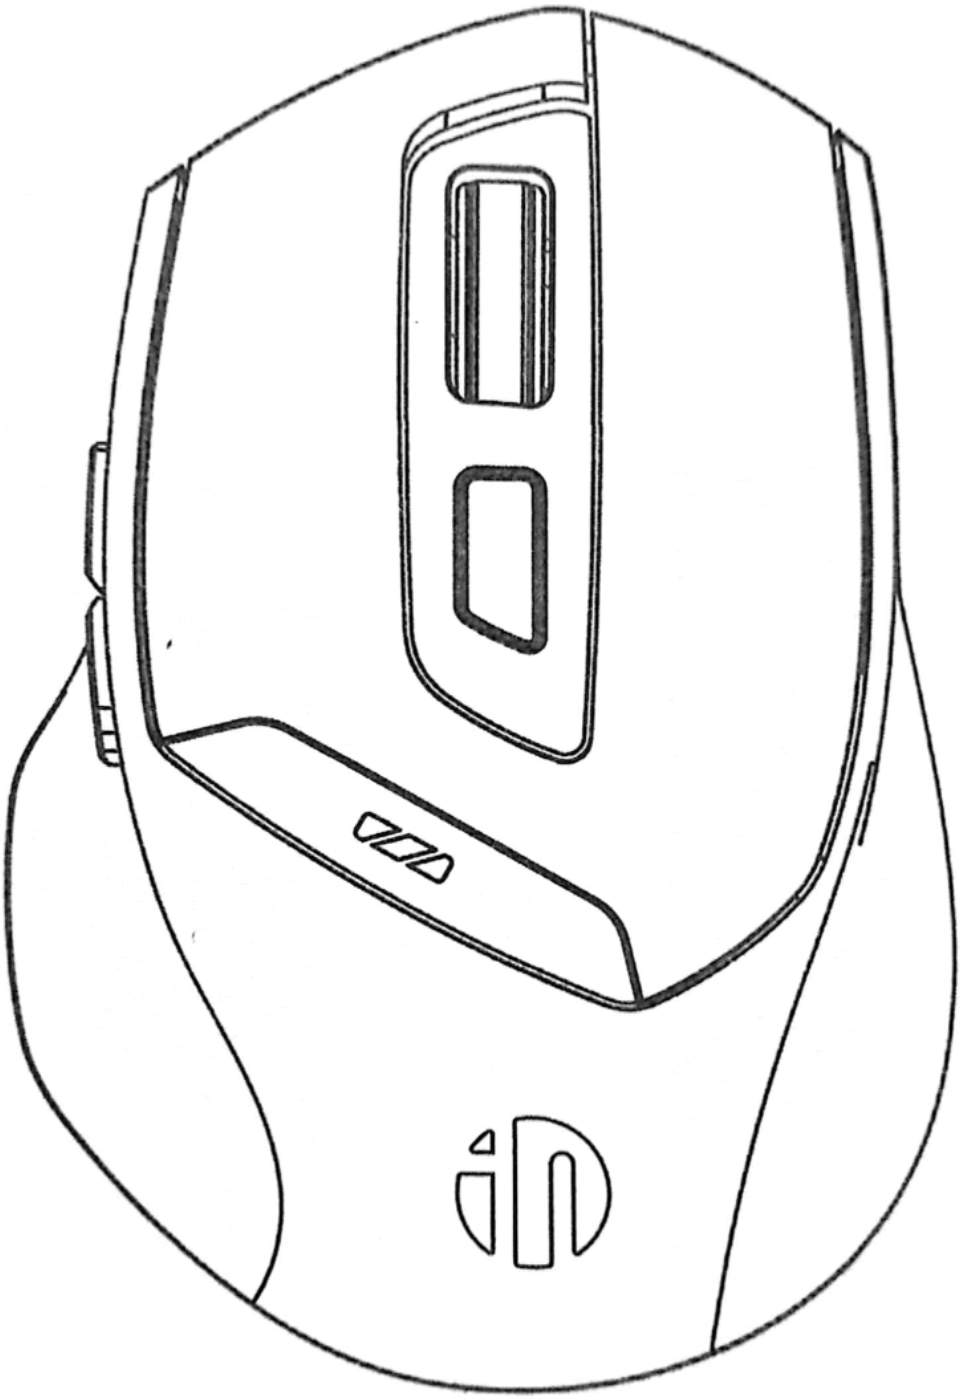

DR01

Usage Guide

使用产品前请仔细阅读本使用说明书

Dipindai dengan CamScanner

inphic 新国货 好鼠标

非常感谢您选择英菲克DR01蓝牙三模鼠标

Thank you very much for choosing the Inphic DR01 Tri-mode mouse

按键接口说明 Button description

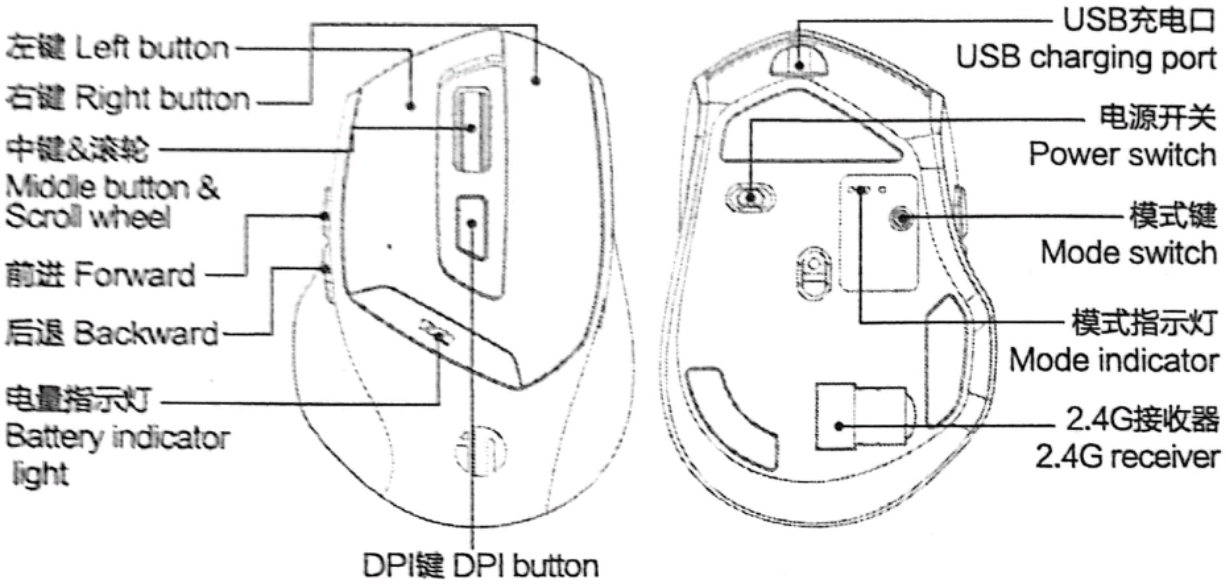

技术参数 Specifications

产品型号：DR01	Model number: DR01
连接方式：2.4G/BT1/BT2	Connection method: 2.4G/BT1/BT2
内置电池电压：3.7V	Built-in battery voltage: 3.7V
额定输入：5V⎓500mA	Rated input: 5V⎓500mA
寻迹系统：光学	Tracking system: Optical tracking
USB接口：1.1/2.0	USB interface: USB1.1/2.0
分辨率：800/1200/1600/2000/2400 DPI	Resolution: 800/1200/1600/2000/2400 DPI
操作系统： Windows, macOS, iOS, Android系列	Operating system: Windows, macOS, iOS, Android series

无线2.4G模式 Wireless 2.4G mode

①
取出鼠标底部的接收器。
Take out the receiver.

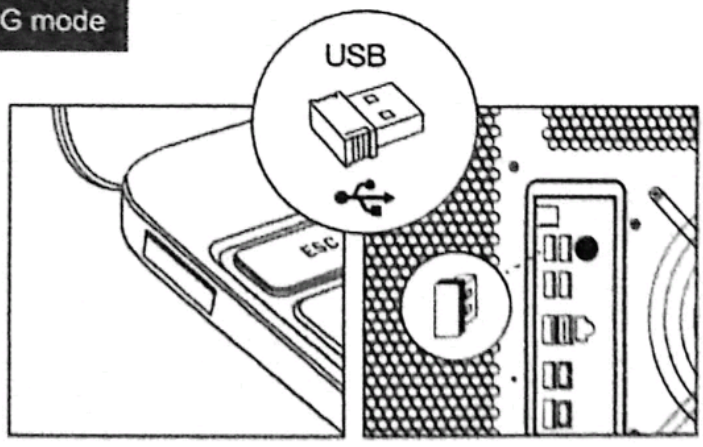

②
将接收器插到电脑USB接口。
Insert the receiver into the USB port of the computer.

Dipindai dengan CamScanner

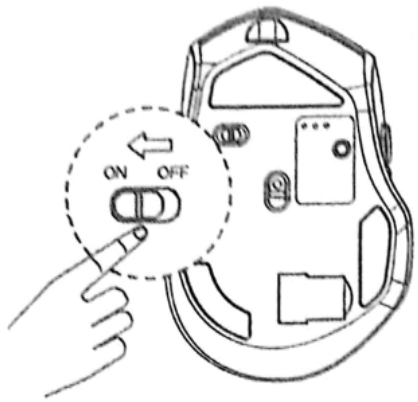

③
将鼠标底部电源开关拨至ON，2.4G指示灯闪烁，直至电量指示灯亮起即可使用。
Power on the mouse. The 2.4G indicator light will flash until the battery indicator light illuminates, indicating that the device is ready for use.

BT蓝牙模式 Bluetooth mode

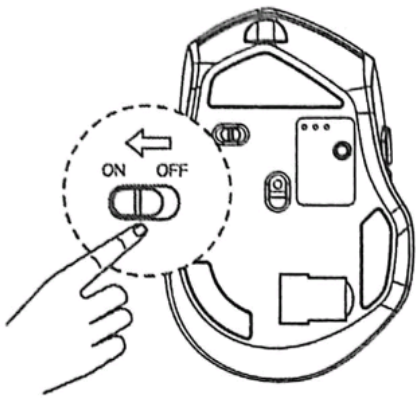

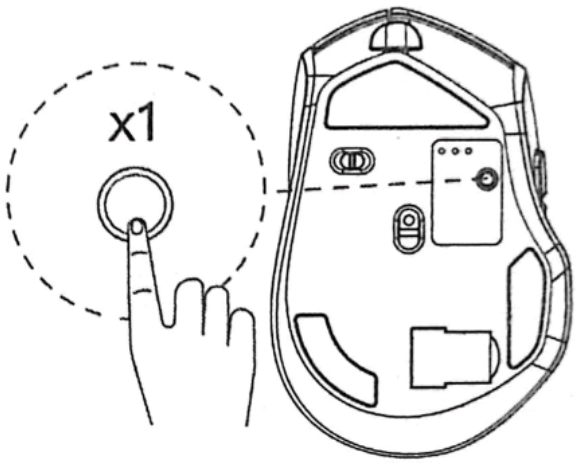

①
首次连接蓝牙时，将电源开关拨至ON后，单击模式键直至BT1灯（或BT2灯）快速闪烁，在3分钟内操作电脑连接鼠标蓝牙即可。已连接过电脑的鼠标，再次使用时将模式键按至BT1（或BT2）即可自动回连。

For first-time Bluetooth connection, set the power switch to ON.Then, press the mode switch button until the BT1 indicator light (or BT2 indicator light) starts flashing rapidly.Within 3 minutes, proceed to connect the mouse to the computer via Bluetooth. For mouse that have previously been connected to a computer, to reconnect, simply press the mode switch button to BT1 (or BT2) and it will automatically reconnect.

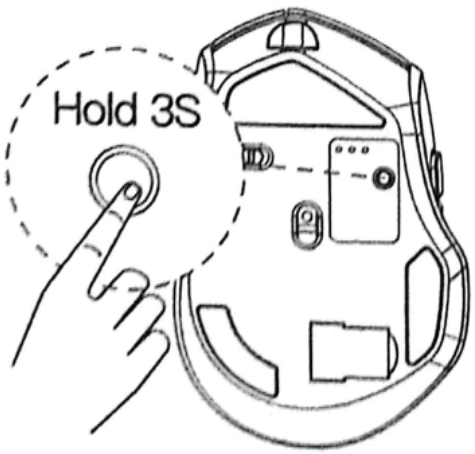

②
蓝牙重新配对:单击模式键直至BT1灯（或BT2灯）闪烁，然后长按模式键，直至BT1灯（或BT2灯）快速闪烁，此时鼠标将重新进入蓝牙配对状态，可连接新设备。

Reset Bluetooth pairing: Press the mode switch button until the BT1 indicator light (or BT2 indicator light) starts flashing. Then, hold down the Mode switch button until the BT1 indicator light (or BT2 indicator light) rapidly flashes.The mouse will then enter Bluetooth pairing mode and be available for connection to new devices.

Dipindai dengan CamScanner

③
BT模式不支持WIN7及以下系统。WIN7及以下系统需要在2.4G模式下使用。
BTmode is not supported on Win7 and earlier systems. Win7 and earlier systems need to use 2.4G mode.

注意事项 Precautions

① 低电量提示
3.3V以下进入低电模式，一颗白色电量显示灯闪烁。当电压处于3.0V时电源自动断电。
Low battery warning
When the mouse battery voltage falls below 3.3V, it enters a low-power mode, and a white power indicator light flashes. When the voltage falls below 3.0V, the mouse power will automatically shut off.

② 蓝牙快闪配对时间3分钟，蓝牙回连时间5秒内。
The quick pairing time for Bluetooth is 3 minutes, and the reconnection time is within 5 seconds.

③ 鼠标停放0.5秒到10分钟内会进入浅休眠，可以移动鼠标或按键唤醒，鼠标停放10分钟后进入深度休眠只能按键唤醒。
The mouse will enter sleep mode if it remains stationary for 0.5 seconds to 10 minutes. It can be woken up by moving the mouse or pressing any key. If the mouse remains stationary for 10 minutes, it will enter hibernation mode and can only be woken up by pressing any key.

④ 蓝牙鼠标BT模式系统版本支持：WIN8 / WIN10 / WIN11，macOS，Android 系统（5.0以上版本），iOS（iOS13.0以上版本）。
BTmode support:WIN8/WIN10/WIN11,mac OS,Android(Android5.0 and above) ,iOS (iOS13 and above).

温馨提示 Tips

建议使用电脑USB接口对鼠标进行充电;
鼠标出现卡顿可能是电量不足导致，请及时给鼠标充电;
充电时间建议两个小时以上，直至电量指示灯全部常亮后再开始使用。
It is recommended to charge the mouse via a computer USB port.
The cursor stuttering may be caused by low battery. Please charge the mouse promptly.
It is recommended to charge for at least two hours, until the battery indicator lights are all solid, before using it again.

Dipindai dengan CamScanner